



BROCHURE

FOREFOOT

# PIP & DIP intramedullary implants




- . Mechanical expension Pure titanium
- . Immediate intraoperative anchorage
- . Rotation resistant mirgration resistant
- Straight or 10° anatomical offset

Creating Better Together™



The Lync® intramedullary implant is intended for arthrodesis of the phalanges in the distal interphalangeal joint of the hand and, the proximal and distal interphalangeal joint of the foot. It is particularly recommended for the treatment of hammertoes. Its anti rotation design reduce the risks of rotation and pullout. Its expansion capacity and the notched grooves allow effective intraoperative anchorage to prevent migration.

# The Lync® Solution

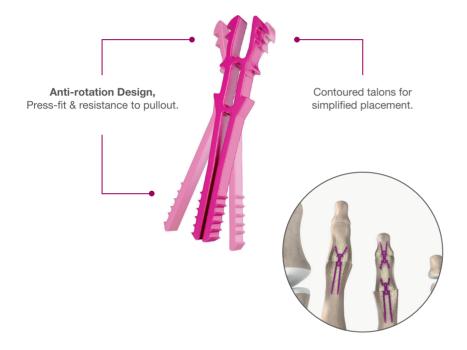

#### Indications

Intramedullary implants are indicated for arthritis and bone alignment defaults (hammertoe, claw toe, mallet toe, claw hand and mallet finger) in fingers and toes.

#### **Features**

Initial anchorage by means of mechanical expansion of the implant.

Interphalangeal gap reduction by compression, anchorage due to press-fit fixation.


Mechanical resistance to pullout and rotation.

No freezing. The implant may be used at ambient temperature.


Anodized pure titanium (Nickel free) - Radiopaque.

DIP

## **The Range**







	Small	Medium	DIP
1 - Total Length	16 mm	20 mm	12 mm
2 - Proximal Length	11 mm	13 mm	6 mm
3 - Distal Length	5 mm	7 mm	6 mm
4 - Initial / Final Proximal Opening*	2 / 8 mm	2 / 8.5 mm	3.5 / 4.0 mm
5 - Initial / Final Distal Opening*	3,5 / 5,5 mm	3,5 / 4,5 mm	2 / 5 mm




<sup>\*</sup> Maximum Opening.

# Minimum Instrumentation, Simplified Technique

## **Only Three Instruments\* Required!**

The Lync® instrumentation, arranged in a dedicated module, consists of a drill, rasp and a set of lync forceps. The surgical technique is simplified and operative time is reduced.

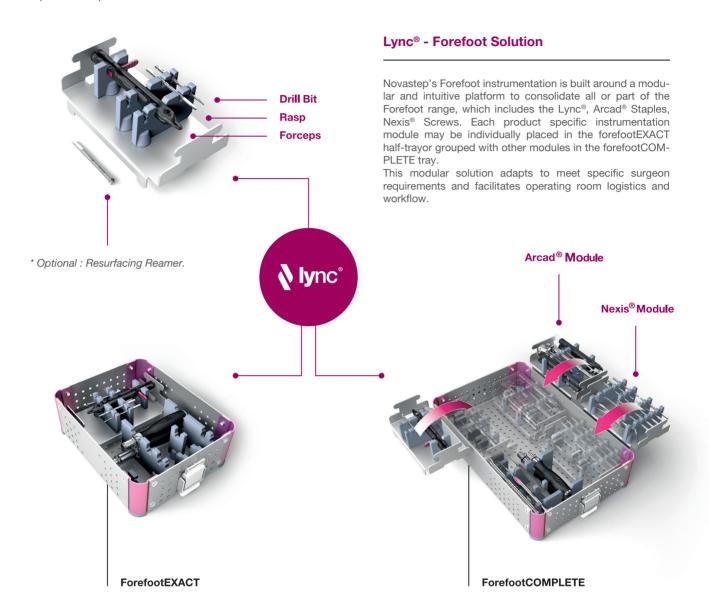

## Forceps: Load and Deploy!

Designed for one-handed operation, the forceps hold the implant for easy insertion into the intramedullary canal and permit rapid deployment of the legs by means of a single click.





# References

#### Lync

Ref	Designation
CM010030	Lync® S0
CM010031	Lync® S10
CM010010	Lync <sup>®</sup> M0
CM010011	Lync® M10
CM010040	Lvnc® DIP

### Instrumentation

Ref	Description
XFP04001	Forceps
XDB01003	Drill Bit Ø 2.3
XRA01002	Rasp
XHA01001	AO Handle
XRE01002	Surfacing reamer - Optional

# Novastep - Forefoot range



#### **NEXIS®:**

Snap-off screw Ø 2 Compressive screw Ø 2.3 Beveled compressive screw Ø 2.7 Compressive screw Ø 2.9 Compressive screw Ø 4



### AIRLOCK®:

MTP plates Utility plates MT base plates



#### **PERCUTANEOUS BURRS:**

Shannon Corta Ø 2 Lg 8 mm Shannon Recta Ø 2 Lg 12 mm Shannon Helical Ø 2 Lg 12 mm Shannon Longa Ø 2.2 Lg 22 mm Shannon Larga Ø 3 Lg 20 mm Shannon X-Larga Ø 3 Lg 30 mm Wedge 3.1 Lg 13 mm Wedge 4.1 Lg 13 mm



### ARCAD®:

Compressive staples Static staples

#### Please note

Carefully read the enclosed Instructions For Use (IFU) and all packaging label information. Devices: Implants: Class IIb-CE1639 / Instruments: Class I / Class Ir-CE1639 / Class IIb-CE1639.

### Novastep:

2, Allée Jacques Frimot - 35000 RENNES - France Tel : + 33 (0) 2 99 33 86 50 / Fax : + 33 (0) 9 70 29 18 95 contact@novastep-ortho.com / www.int.novastep.life

Reference: LYN-ST-Ed6-07-24-EN

